




Optical SAC and UVT sensor UV 70x IQ SAC

Low-cost probe (integrated ultrasonic cleaning, turbidity compensation) for the maintenance-free and reagent-free SAC measurement according to DIN 38404 C3


We would like to inform you about the application range on our website



UV 701 IQ SAC, UV 705 IQ SAC

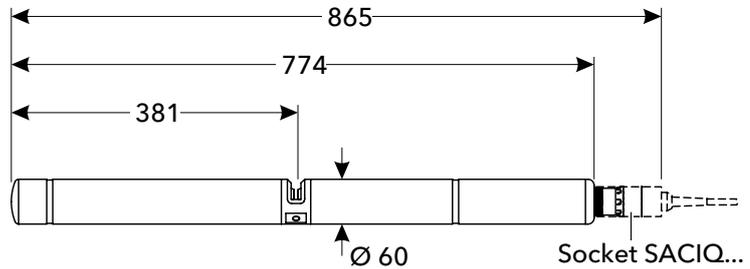

With shock protection:

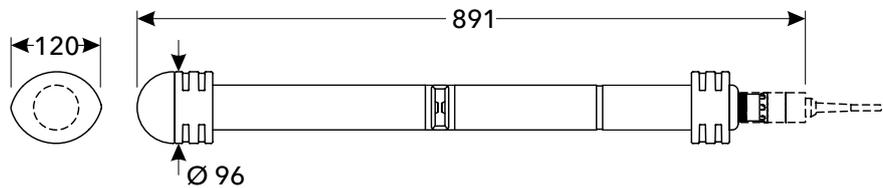

Technical Data

Model	UV 701 IQ SAC	UV 705 IQ SAC
Measuring method	UV-Absorptionsmessung 254 nm (Kompensation 550 nm)	
Measuring gap (optical layer thickness)	1 mm	5 mm
Application (optimized for)	Municipal wastewater with a low proportion of industrial wastewater, wastewater treatment plants, surface water	
Measuring range and Resolution	COD 0.0 ... 12,500 mg/l 1 mg/l TOC 0.0 ... 20,000 mg/l 1 mg/l DOC 0.0 ... 12,500 mg/l 1 mg/l BOD 0.0 ... 8,000 mg/l 1 mg/l SAC _{254 total} 0.0 ... 3,000 1/m 1 1/m SAC _{254 dissolv} 0.0 ... 3,000 1/m 1 1/m UVT _{254 total} * 0.0 ... 100.0 % 0.1 % UVT _{254 dissolv} * 0.0 ... 100.0 % 0.1 %	0.0 ... 800 mg/l 1 mg/l 0.0 ... 500.0 mg/l 0.1 mg/l 0.0 ... 500.0 mg/l 0.1 mg/l 0.0 ... 500.0 mg/l 0.1 mg/l 0.0 ... 600.0 1/m 0.1 1/m 0.0 ... 600.0 1/m 0.1 1/m 0.0 ... 100.0 % 0.1 % 0.0 ... 100.0 % 0.1 %
Flow rate	≤ 3 m/s	
Pressure Resistance	Maximum 1 bar (incl. sensor connection cable)	
Electrical connections	2-wire shield cable with quick fastener to sensor	
Electromagnetic Compatibility	EN 61326, Class B, FCC Class A Intended for indispensable operation	
Certifications	CE	
Mechanical	Housing: Titan Grade 2, PEEK Window: Sapphire glass Protection class: IP 68	
Weight (without cable)	Approx. 8.82 lb (4 kg)	
Warranty	2 years for defects in quality	

* The UVT-254 value is standardized to 10 mm gap width.

Model	Description	Order No.
UV 701 IQ SAC	Optical SAC and UVT sensor (254 nm) to measure higher concentrations with integrated ultrasonic cleaning, multifunctional slide and shock-absorption-rings, without connecting cable (order SACIQ separately)	481036
UV 705 IQ SAC	Like UV 701 IQ SAC, but to measure lower concentrations	481038



Xylem Analytics Germany Sales GmbH & Co. KG, WTW

Dr.-Karl-Slevogt-Straße 1 · D-82362 Weilheim · Germany · Phone: +49 881 1830 · Fax: +49 881 183-420 · Info.WTW@Xyleminc.com

All names are registered tradenames or trademarks of Xylem Inc. or one of its subsidiaries. Technical changes reserved.

© 2017 Xylem Analytics Germany Sales GmbH & Co. KG.

999239US

www.WTW.com

December 2018